

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 966 940 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
29.12.1999 Bulletin 1999/52

(51) Int Cl.⁶ A61F 13/15

(21) Application number: 99304159.9

(22) Date of filing: 28.05.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 29.05.1998 JP 14908298
23.04.1999 JP 11713999

(71) Applicant: UNI-CHARM CORPORATION
Kawanoe-shi Ehime-ken (JP)

(72) Inventors:
• Tanji, Hiroyuki,
c/o Research & Development Divis.
Mitoyo-gun, Kagawa-ken 769-1602 (JP)


• Otsubo, Toshifumi,
c/o Resear.& Development Divis.
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
• Nishima, Yoshitaka,
c/o Resear.& Development Divis
Mitoyo-gun, Kagawa-ken 769-1602 (JP)

(74) Representative: Enskat, Michael Antony Frank
Saunders & Dolleymore,
9, Rickmansworth Road
Watford, Hertfordshire WD1 7HE (GB)

(54) Body waste disposal article and method for making same

(57) A body waste disposal article 1 adapted to receive feces and/or urine discharged thereon, the article 1 having a body fluids absorbent means 6 above which an opening 8 is formed by a surrounding wall 7 partially covering the body fluids absorbent means 6 and sur-

rounding the opening 8. The article 1 is longitudinally composed of a front end 41, a rear end 42 and an intermediate region 43 extending between these two ends 41, 42. The article 1 is configured so as to have the largest width in its intermediate region 43.

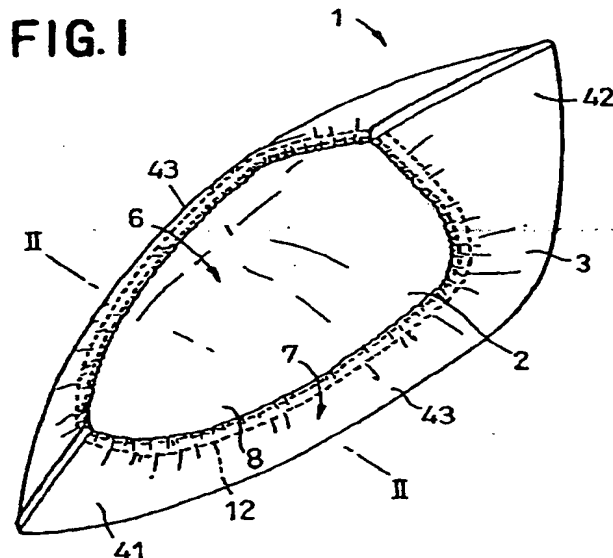

Description

[0001] The present invention relates to a method for making a body waste disposal article adapted to be utilized in combination with the other article such as a disposable diaper, disposable incontinent pants and the like.

[0002] Japanese Patent Application Disclosure Gazette No. 1993-293138 describes a method for forming a body-facing topsheet of a disposable diaper with an elastic opening. This topsheet is provided along a periphery of the opening with an elastic member secured thereto in an extended state so as to describe a circular arc. According to this disclosure, a sheet for forming the topsheet is continuously fed and the elastic member in an extended state is fed while the elastic member is swung transversely of the sheet using traverse means so that the elastic member may describe the circular arcs on the continuous topsheet.

[0003] The known method for forming the topsheet of the diaper with the elastic opening is disadvantageous in that, while the sheet can be fed at a relatively high speed, the speed at which the traverse means can be operated is limited and, in consequence, an output per unit time is also restricted. In addition, introduction of the traverse means into the production line for the diaper inevitably leads to an increase of the equipment investment and therefore to a corresponding increase in the manufacturing cost of the diaper.

[0004] In view of the problems as have been described above, it is an object of the present invention to provide a simplified method for making a body waste disposal article such as a disposable diaper having an elastic opening and thereby to solve the problems mentioned above.

[0005] According to the present invention, there is provided a body waste disposal article according to a first aspect of the present invention (referred to hereinafter as a first invention), a first method for making this article according to a second aspect of the present invention (referred to hereinafter as the second invention) and a second method for making this article according to a third aspect of the present invention (referred to hereinafter as the third invention).

[0006] The first invention relates to a body waste disposal article having a body fluids absorbent means comprising a liquid-pervious topsheet, a liquid-impervious backsheet and a liquid-absorbent core disposed therebetween, a surrounding wall being defined by a portion of at least one of the topsheet and the backsheet extending outward beyond a peripheral edge of a absorbent means and folded back to partially cover a top surface of said absorbent means in proximity of the peripheral edge and thereby to leave an opening surrounded by the surrounding wall above a central zone of the absorbent means, and the surrounding wall being elastically stretchable and contractable along an edge of the opening.

[0007] In the article as has been described above, the first present invention is characterized in that the absorbent means has a longitudinal direction and a transverse direction being orthogonal to the longitudinal direction in which the absorbent means is composed of a front end, a rear end and an intermediate region extending between these front and rear ends so that the absorbent means is configured to have the largest width in the intermediate region.

[0008] The first invention includes various embodiments as follow:

(1) The absorbent means has its width progressively enlarged from the front and rear ends to the intermediate region.

(2) The intermediate region has the largest width at its position a little to the rear end.

(3) The front and rear ends are covered with the surrounding wall.

(4) The opening is provided along its edge with a belt-like elastic member having a width of 5 - 50 mm and, in the intermediate region, the surrounding wall is bonded to the lower surface of the elastic member along its transversely middle zone so that the elastic member and the surrounding wall present together a substantially T-shaped cross-section when the article is worn by a wearer.

[0009] The second invention relates to a method for making a body waste disposal article having a body fluids absorbent means comprising a liquid-pervious topsheet, a liquid-impervious backsheet and a liquid-absorbent core disposed therebetween, a surrounding wall being defined by a portion of at least one of the topsheet and the backsheet extending outward beyond a peripheral edge of the absorbent means and folded back to partially cover a top surface of the absorbent means in proximity of the peripheral edge and thereby to leave an opening surrounded by the surrounding wall above a central zone of the absorbent means, and the surrounding wall being elastically stretchable and contractable along an edge of the opening.

[0010] In the method as has been described above, the second invention is characterized by that the method comprises the steps of:

a. covering the core with the topsheet and the backsheet which are, in turn, bonded to each other along portions of the topsheet and the backsheet extending outward beyond a peripheral edge of the core to obtain a laminate;

b. bonding elastic members to any one of the topsheet and the backsheet with a rectilinear tension along transversely opposite edges of the topsheet or the backsheet extending in parallel to each other with the core lying therebetween;

c. folding the laminate back onto itself with the topsheet lying inside so that the elastic members on

the side edges may be placed upon each other;
 d. bonding respective halves of the laminate, which has been folded back onto itself, to each other along a pair of imaginary lines intersecting the side edges and extending in parallel to each other with the core lying therebetween; and
 e. releasing the elastic members to contract after the step d.

[0011] According to an embodiment of the second invention, the elastic members are belt-like elastic members each being 5 - 50 mm wide and secured to the side edges along a transversely middle line of this belt-like elastic member. The method according to the second invention may further comprise a step of forming the backsheet with means used to fasten the article to a wearer's garment.

[0012] The third invention also relates to a method for making a body waste disposal article having a body fluids absorbent means comprising a liquid-pervious topsheet, a liquid-impervious backsheet and a liquid-absorbent core disposed therebetween, a surrounding wall being defined by a portion of at least one of the topsheet and the backsheet extending outward beyond a peripheral edge of the absorbent means and folded back to partially cover a top surface of the absorbent means in proximity of the peripheral edge and thereby to leave an opening surrounded by the surrounding wall above a central zone of the absorbent means, and the surrounding wall being elastically stretchable and contractable along an edge of the opening.

[0013] In the method as has been described above, the third invention is characterized by that the method comprises the steps of:

- a. continuously feeding a first web for forming the topsheet and a second web for forming the backsheet in one direction, respectively;
- b. continuously feeding the elastic members in the one direction and securing them with a rectilinear tension to any one of the first and second webs, along transversely opposite side edges of the web;
- c. intermittently feeding the cores in the one direction onto any one of the first and second webs in transversely middle regions of the web;
- d. placing the first and second webs upon each other to sandwich the cores therebetween, after the elastic members and the cores have been fed; and thereby to form a third web comprising these first and second webs, elastic members and cores;
- e. folding the third web back onto itself with the first web lying inside so that the elastic members on the side edges may be placed upon each other;
- f. bonding mutually facing halves of the first web making the part of the third web, which has been folded back onto itself, to each other in a region of the third web extending between each pair of the adjacent cores;

g. cutting the third web which has been folded onto and bonded to itself on the step f in the region extending between each pair of the adjacent cores along an imaginary line extending transversely of the third web so that the region may partially remain on both sides of the imaginary line; and
 h. releasing the elastic members to contract after the step g.

[0014] According to an embodiment of the third invention, the elastic members are belt-like elastic members each being 5 - 50 mm wide and bonded to the side edges along a transversely middle line of the belt-like elastic member. The method according to the third invention may further comprise a step of forming the second web with means used to fasten the article to a wearer's garment.

Fig. 1 is a perspective view of an embodiment of a body waste disposal article according to the present invention;

Fig. 2 is a sectional view taken along a line II-II in Fig. 1;

Fig. 3 is a plan view showing the disposal article as attached to a diaper cover;

Fig. 4 is a diagram exemplarily illustrating the steps for making the disposal article;

Fig. 5 is a view similar to Fig. 1 showing another embodiment of the disposal article according to the present invention;

Fig. 6 is a plan view showing the disposal article of Fig. 5 as attached to the diaper cover;

Fig. 7 is a perspective view showing still another embodiment of the disposal article having partially cut away;

Fig. 8 is a sectional view taken along a line VIII-VIII in Fig. 7;

Fig. 9 is a sectional view taken along a line IX-IX in Fig. 7;

Fig. 10 is a side view schematically illustrating the steps for making the disposal article of Fig. 5;

Fig. 11 is a plan view showing an important part of the steps schematically illustrated by Fig. 10;

Fig. 12 is a sectional view taken along a line XII-XII in Fig. 11;

Fig. 13 is a view similar to Fig. 12 showing a specific embodiment of a web; and

Fig. 14 is a fragmentary diagram exemplarily showing a part of the steps for making the disposal article.

[0015] Details of a method for making a body waste disposal article according to the present invention will be more fully understood from the description given hereunder with reference to the accompanying drawings.

[0016] Fig. 1 is a perspective view showing a body waste disposal article 1 and Fig. 2 is a sectional view

taken along a line II-II in Fig. 1. The article 1 is adapted to receive body wastes, particularly feces discharged thereon and suitable for utilization in combination with a diaper, a diaper cover or an undergarment worn by a wearer.

[0017] The disposal article 1 comprises a liquid-pervious topsheet 2, a liquid-impervious backsheet 3 and an absorbent core 4 disposed between these two sheets 2, 3. The topsheet 2 and the backsheet 3 and the core 4 form a body fluids absorbent means 6. Portions of the topsheet 2 and the backsheet 3 extending outward beyond a peripheral edge of the core 4 are folded back upward along the peripheral edge of the core 4, after they have been placed upon and bonded to each other, to form a surrounding wall 7. Above the top surface of the body waste absorbent means 6 in proximity of its central zone, there is formed an opening 8 surrounded by the surrounding wall 7. The surrounding wall 7 has an elastic member 12 extending in a ring-shape along a periphery of the opening 8 and secured in an extended state to an inner surface of at least one of the topsheet 2 and the backsheet 3. The disposal article 1 is longitudinally composed of a tapering front end 41, a tapering rear end 42 and an intermediate region 43 extending between these two ends 41, 42. The disposal article 1 has its width progressively enlarged from the front and rear ends 41, 42 toward the intermediate region 43 and is configured to have its largest width at a position a little to the rear end 42. The backsheet 3 constituting the absorbent means 6 is applied on its lower surface with an adhesive agent 9 and protectively covered with a release sheet 11.

[0018] Fig. 3 is a plan view showing the disposal article 1 as attached to a diaper cover 21 having partially cut away. The diaper cover 21 comprises a laminate of a topsheet 22 made of a plastic film and a backsheet 23 made of a nonwoven fabric and has a hourglass-shape. The diaper cover 21 is longitudinally composed of a front waist region 26, a rear waist region 27 and a crotch region 28 extending between these two waist regions 26, 27. Transversely opposite side edges of the crotch region 28 are curved inwardly of the diaper cover 21. The crotch region 28 is provided along its side edges with elastic members 29 adapted to surround a wearer's legs and these elastic members 29 are secured in an extended state to an inner surface of at least one of the topsheet 22 and the backsheet 23. The disposal article 1 having the release sheet 11 peeled off is detachably fastened by means of the adhesive agent 9 to an inner surface of the diaper cover 21 over its zone extending across the rear waist region 27 and the crotch region 28. It is possible for the disposal article 1 to be attached to the diaper cover 21 over its zone selected depending on a wearer's body characteristics.

[0019] The diaper cover 21 is provided on transversely opposite side edges of the rear waist region 27 with tape fasteners 31 by means of which an assembly of the disposal article 1 and the diaper cover 21 as shown in

Fig. 3 and can be worn substantially in the same manner as the conventional disposable diaper is worn so that the wearer's anus may lie substantially in a central zone of the opening 8 of the disposal article 1.

[0020] With the disposal article 1 utilized in the manner as has been described above, feces is properly discharged into the opening 8 and the diaper cover 21 is well prevented from being soiled with feces. For disposal of the feces, it is unnecessary to handle the diaper cover 21 of a relatively large size and only the article 1 of a relatively small size may be handled. Accordingly, operation of the disposal is correspondingly alleviated. By placing the tapering front end 41 in the crotch region 28 when the diaper cover 21 is worn, the front end 41 is smoothly received between the wearer's legs and the disposable article 1 does not give a feeling of wrongness against the wearer. The disposal article 1 is adequately wide in proximity of the rear end 42 and can receive a large amount of feces. It is also possible to increase an adhesive strength of the adhesive agent so that the disposal article 1 may be permanently attached to the diaper cover 21. The disposal article 1 can be attached also to an inner surface of the disposable diaper or undergarments, instead of being attached to the diaper cover 21.

[0021] Fig. 4 is a diagram illustrating the steps 4A - 4C for making the disposal article 1 shown in Fig. 1. On the step 4A, the liquid-pervious topsheet 2 and the liquid-impervious backsheet 4C both having an inverted trapezoidal shape of an identical size are placed upon each other with the absorbent core 4 disposed therebetween in a central zone of these two sheets 2, 3; then, the portions of these two sheets 2, 3 extending outward beyond the peripheral edge of the core 4 are bonded together by means of hot melt adhesive (not shown) to form a trapezoidal laminate 40. The laminate 40 has transversely opposite side edges 42, 42, longitudinally opposite end edges 44, 45 both extending between the side edges 42, 42, wherein the end edge 44 is dimensioned to be longer than the end edge 45. Inside the side edges 42, 42 of the laminate 40, the elastic members 12, 12 are secured with a rectilinear tension to the laminate 40 by means of hot melt adhesive (not shown). In this embodiment illustrated, these elastic members 12, 12 are disposed between the topsheet 2 and the backsheet 3 and bonded to the inner surface of at least one of the topsheet 2 and the backsheet 3. The core 4 may be bonded to at least one of the topsheet 2 and the backsheet 3. As will be apparent from Fig. 4B, the adhesive agent 9 previously applied on the backsheet 3 is protectively covered with the release sheet 11.

[0022] On the step 4B, the laminate 40 is folded along a center line C-C back onto itself with the topsheet 2 lying inside and bonded together along the end edges 44, 45, both placed upon themselves as the laminate 40 is folded back, respectively, by means of hot melt adhesive agents 47, 48 (See the step 4B). The adhesive agent 9 having been applied on the backsheet 3 prior to

the step b is protectively covered with the release sheet 11. It should be understood that the laminate 40 folded back is shown in Fig. 4B as partially cut away.

[0023] On the step 4C, the elastic members 12, 12 are released to contract. Such contraction of the elastic members 12, 12 causes the portion of the topsheet 2 and the backsheet 3 extending outward beyond the peripheral edge of the core 4 to be bent inward along the peripheral edge of the core 4 with the topsheet 2 lying inside. The portions of the topsheet 2 and the backsheet 3 bent inward define the surrounding wall 7 which partially covers the core 4 in proximity of its peripheral edge and leaves the opening 8 above the central zone of the core 4. of the laminate 40, a region in proximity of the end edge 44 forms the front end 41 and a region in proximity of the end edge 45 forms the rear end 42. In this way, the disposal article 1 shown in Figs. 1 and 2 is obtained, in which the respective elastic members 12, 12 describe circular arcs along the periphery of the opening 8.

[0024] The region extending between the front and rear ends 41, 42 is curved outwardly of the disposal article 1 and a depth of the disposal article 1 from the opening 8 to the core 4 increases as a degree of contraction exhibited by each of the elastic members 12, 12.

[0025] Fig. 5 is a view similar to Fig. 1 showing an alternative embodiment of the disposal article 1. In this disposal article 1, a degree at which the front end 41 is tapered is substantially the same as a degree at which the rear end 42 is tapered. Between these front and rear ends 41, 42, the intermediate region 43 has a substantially uniform width. As far as the cross-sectional shape is concerned, no difference is found between these two embodiments.

[0026] Fig. 6 is a plan view showing the disposal article 1 of Fig. 5 as attached to the crotch region 28 of the diaper cover 21. The disposal article 1 shown in Fig. 6 is characterized by that a dimension between the front and rear ends 41, 42 is longer than in the embodiment shown in Fig. 3 and the opening 8 is correspondingly larger. Such an arrangement allows feces and urine to be more reliably received by the larger opening 8.

[0027] Fig. 7 is a view similar to Fig. 5 showing still another embodiment of the disposal article 1 having partially cut away and Figs. 8, 9 are sectional views taken along lines VIII-VIII and IX-IX in Fig. 7. According to this embodiment of the disposal article 1, the opening 8 is provided along its periphery with the belt-like elastic members 12, 12 being 5 - 50 mm wide and forming together a loop. Each of the elastic members 12, 12 comprises a plurality of rubber threads 12A put under appropriate tension and covered with a nonwoven fabric 12B. The portion of the backsheet 3 folded back inwardly of the article 1 is bonded to the elastic member 12 along its transversely middle zone. With the article 1 being put on a wearer's body, the elastic members 12, 12 cooperate with the backsheet 3 in the intermediate region 43 extending between the front and rear ends 41, 42 to lift

off above the absorbent means, presenting a substantially T-shaped cross-section (See Fig. 8). At the same time the elastic members 12, 12 are spaced from each other to describe an enlarged loop which is placed against a wearer's skin and reliably prevents feces and urine from leaking out beyond the peripheral edge of the article 1. In order to ensure that the elastic members 12, 12 cooperate with the backsheet 3 to present the cross-section as shown in Fig. 8, it is preferred to arrange a plurality of rubber threads 12A describing a loop so that the stretch stress should gradually increase from the outermost rubber thread to the innermost rubber thread of the respective elastic members 12. In proximity of the front and rear ends of the article 1, the elastic members 12, 12 are preferably secured substantially over their entire width to an outer surface of the backsheet 3 as shown in Fig. 9. The article 1 shown in Fig. 8 is distinguished from the article 1 shown in Fig. 2 in that the portion of the backsheet 3 extending outward beyond the peripheral edge of the core 4 and folded back is longer than the corresponding portion of the topsheet 2. The surrounding wall 7 partially covering the body fluids absorbent means 6 along its peripheral edge is substantially defined by the backsheet 3.

[0028] Fig. 10 is a side view schematically illustrating the steps for continuously making the disposal article 1 shown in Fig. 5 and Fig. 11 is a plan view showing an important part in the side view. Fig. 10 illustrates the steps g - k with a nonwoven fabric 102 and a plastic film 103 really covering a core 104 cut away in order that the absorbent core 104 can be seen.

[0029] Referring to Figs. 10 and 11, on the step a, a web of liquid-impervious plastic film 103 for forming the backsheet 3 of the body fluids absorbent means 6 is continuously fed from the left to the right as viewed in Fig. 10 (from the top to the bottom as viewed in Fig. 11).

[0030] On the step b, hot melt adhesive (not shown) is discharged from a first nozzle 131 and applied on the film 103 along its transversely opposite side edges.

[0031] On the step c, elastic members 112 with a rectilinear tension are continuously fed and secured to the film 103 immediately inside its transversely opposite side edges by means of the hot melt adhesive which has been applied thereon on the previous step b.

[0032] On the step d, hot melt adhesive (not shown) is discharged from a second nozzle 132 and intermittently or continuously applied on the film 103 transversely as well as longitudinally thereof.

[0033] On the step e, the absorbent cores 104 transported by a feeder 134 are intermittently placed on the film 103 in its transversely middle zone in a longitudinal direction of the film 103 and bonded to the film 103 by means of the hot melt adhesive which has been applied thereon on the previous step d.

[0034] On the steps of f and g, the web of the liquid-impervious nonwoven fabric 102 for forming the topsheet 2 of the body fluids absorbent means 6 is continuously fed. The nonwoven fabric 102 having a width substan-

tially the same as the width of the film 103 covers the film 103 over its full width together with the cores 104 and is bonded to the film 103 by means of the hot melt adhesive which has been applied thereon on the previous step d. In this manner, the web comprising the nonwoven fabric 102, the film 103 and the cores 104 is obtained.

[0035] On the step h, adhesive 136 discharged from a third nozzle 133 (See Fig. 11) is applied on an upper surface of the nonwoven fabric 102 so that the adhesive (136)-applied zone extends transversely across the nonwoven fabric 102 between each pair of the adjacent cores 104. The adhesive 136 should be applied on the nonwoven fabric 102 at least over a half of its full width, i. e., over an extent defined from one of its side edges to the center line C-C (See Fig. 11). In the case illustrated, the adhesive 136 is applied on the nonwoven fabric 102 over its full width.

[0036] On the step i, the nonwoven fabric 102 and the film 103 placed upon each other are folded back along the center line C-C with the nonwoven fabric 102 lying inside and respective halves of the nonwoven fabric 102 are bonded together by means of the adhesive 136.

[0037] On the steps j and k, the nonwoven fabric 102 and the film 103 placed upon each other is cut by a cutter 137 so that each of the adhesive(136)-applied zones may be divided in two as viewed in the machine direction to obtain the individually folded disposal articles 1.

[0038] On the step l, the disposal article 1 obtained on the previous steps j and k is unfolded. As the article 1 is unfolded, the elastic members 112 are released to contract. Upon contracting of the elastic members 112, the respective portions of the nonwoven fabric 102 and the film 103 extending outward beyond the peripheral edge of the core 104, placed upon and bonded to each other are curved inward along the peripheral edge of the core 104. The respective portions form the surrounding wall 7 as shown in Fig. 5, which forms, in turn, the opening 8. However, there may be a case in which the disposal article 1 is supplied to consumers without being unfolded as shown in Fig. 5 and unfolded by the consumers immediately before the article 1 is actually utilized. In this case, the step 1 can be eliminated.

[0039] The nonwoven fabric 102, the film 103, the core 104 and the elastic members 112 which have been used on the steps for making the disposal article 1 are respectively destined to form the topsheet 2, the backsheet 3, the core 4 and the elastic members 12 of each finished disposal article 1.

[0040] Fig. 12 is a sectional view of the web obtained on the step g as taken along a line XII-XII in Fig. 11. As will be apparent from Fig. 12, the core 104 and the elastic members 112 are covered with the nonwoven fabric 102 and the film 103.

[0041] Fig. 13 is a view similar to Fig. 12, showing another embodiment of the web obtained on the step g illustrated in Fig. 11. According to this embodiment, the side edges of the film 103 are folded back to cover the

elastic members 112, respectively. To obtain the disposal article 1 according to this embodiment, the film 103 having a width larger than that of the nonwoven fabric 102 may be used and the steps illustrated in Fig. 10 may be added with a step of folding the side edges of the film 103 as shown.

[0042] Fig. 14 is a view corresponding to the step i in Fig. 11, showing an alternative embodiment of the present invention. In the case of this embodiment, a pair of the adhesive(136)-applied zones extend in parallel to each other between a pair of the adjacent cores 104. On the subsequent step j, the web is cut between the pair of the adjacent adhesive(136)-applied zones. The disposal article 1 obtained in this manner is advantageously free from an apprehension that the adhesive 136 might be exposed along end surfaces given by the step j of cutting and offensively stimulate a wearer's skin.

[0043] For exploitation of the present invention, it is also possible to bond the respective members of the disposal article 1 by using the well known heat-sealing technique instead of using the adhesive agent so far as the members to be bonded to each other are of heat-sealable materials. While the adhesive 9 shown in Fig. 2 is not essential for the disposal article 1, a step of applying the adhesive 9 may be inserted into the course from the step b to the step h illustrated in Fig. 10, if necessary. It is also possible to replace the adhesive 9 by a hook or loop member making a part of the mechanical fastener which is well known under the trademark "VEL-CRO" or "MAGIC TAPE". Specifically, the hook or loop member bonded to the backsheet 3 may be used to fasten the disposal article 1 to an undergarment such as a diaper cover.

[0044] The body waste disposal article according to the present invention enables it to receive and hold feces exclusively and thereby to prevent the diaper as a whole from being soiled with feces. The article is tapered toward its front end so that the article may be smoothly placed against a wearer's crotch zone.

[0045] The method according to the present invention for making the body waste disposal article enables it to rectilinearly feed the elastic members by eliminating use of the traverse means as has been essential for the prior art to swing the elastic members in the course of attaching the elastic members along the periphery of the opening. In a consequence, there is no apprehension that a productivity for the disposal article might be adversely affected by a feeding rate of the elastic members which would be inevitably restricted by use of the traverse means. In addition, such rectilinear manner of feeding the elastic members enables the feeding equipment to be correspondingly simplified and thereby undesirable increase in the cost of the disposal article due to the equipment investment can be avoided.

Claims

1. A body waste disposal article having a body fluids absorbent means comprising a liquid-pervious topsheet, a liquid-impervious backsheet and a liquid-absorbent core disposed therebetween, a surrounding wall being defined by a portion of at least one of said topsheet and said backsheet extending outward beyond a peripheral edge of said absorbent means and folded back to partially cover a top surface of said absorbent means in proximity of said peripheral edge and thereby to leave an opening surrounded by said surrounding wall above a central zone of said absorbent means, and said surrounding wall being elastically stretchable and contractable along an edge of said opening, wherein:
 - a. said absorbent means has a longitudinal direction and a transverse direction being orthogonal to said longitudinal direction in which said absorbent means is composed of a front end, a rear end and an intermediate region extending between the front and rear end so that said absorbent means is configured to have the largest width in said intermediate region.
2. The article according to Claim 1, wherein said absorbent means has its width progressively enlarged from said front and rear ends to said intermediate region.
3. The article according to Claim 1, wherein said intermediate region has the largest width at its position a little to said rear end.
4. The article according to Claim 1, wherein said front and rear ends are covered with said surrounding wall.
5. The article according to any one of Claim 1, wherein said opening is provided along its edge with a belt-like elastic member having a width of 5 - 50 mm and, in said intermediate region, said cover sheet is bonded to a lower surface of said elastic member along its transversely middle zone so that said elastic member and said surrounding wall present together a substantially T-shaped cross-section when said article is worn by a wearer.
6. A method for making a body waste disposal article having a body fluids absorbent means comprising a liquid-pervious topsheet, a liquid-impervious backsheet and a liquid-absorbent core disposed therebetween, a surrounding wall being defined by a portion of at least one of said topsheet and said backsheet extending outward beyond a peripheral edge of said absorbent means and folded back to partially cover a top surface of said absorbent means in proximity of said peripheral edge and thereby to leave an opening surrounded by said surrounding wall above a central zone of said absorbent means, and said surrounding wall being elastically stretchable and contractable along an edge of said opening, said method comprising the steps of:
 - a. covering said core with said topsheet and said backsheet which are, in turn, bonded to each other along their portions extending outward beyond a peripheral edge of said core to obtain a laminate;
 - b. bonding elastic members to any one of said topsheet and said backsheet with a rectilinear tension along transversely opposite edges of the topsheet or the backsheet extending in parallel to each other with said core lying therebetween;
 - c. folding said laminate back onto itself with said topsheet lying inside so that said elastic members on said side edges may be placed upon each other;
 - d. bonding respective halves of said laminate, which have been folded back onto itself, to each other along a pair of imaginary lines intersecting said side edges and extending in parallel to each other with said core lying therebetween; and
 - e. releasing said elastic members to contract after said step d.
7. The method according to Claim 6, wherein said elastic members are belt-like elastic members each being 5 - 50 mm wide and secured to said side edges along a transversely middle line of this belt-like elastic member.
8. The method according to Claim 6, further comprising a step of forming said backsheet with means used to fasten said article to a wearer's garment.
9. A method for making a body waste disposal article having a body fluids absorbent means comprising a liquid-pervious topsheet, a liquid-impervious backsheet and a liquid-absorbent core disposed therebetween, a surrounding wall being defined by a portion of at least one of said topsheet and said backsheet extending outward beyond a peripheral edge of said absorbent means and folded back to partially cover a top surface of said absorbent means in proximity of said peripheral edge and thereby to leave an opening surrounded by said surrounding wall above a central zone of said absorbent means, and said surrounding wall being elastically stretchable and contractable along an edge of said opening, said method comprising the steps of:
 - a. continuously feeding a first web destined to form said topsheet and a second web destined

to form said backsheet in one direction, respectively;

b. continuously feeding said elastic members in said one direction and bonding them with a rectilinear tension to any one of said first and second webs along transversely opposite side edges of the web; 5

c. intermittently feeding said cores in said one direction onto any one of said first and second webs in transversely middle regions of the web; 10

d. placing said first and second webs upon each other to sandwich said cores therebetween, after said elastic members and said cores have been fed, and thereby to form a third web comprising these first and second webs, elastic members and cores; 15

e. folding said third web back onto itself with said first web lying inside so that said elastic members on said side edges may be placed upon each other; 20

f. bonding mutually facing halves of said first web making the part of said third web, which has been folded back onto itself, to each other in a region of said third web extending between each pair of the adjacent cores; 25

g. cutting said third web which has been folded onto and bonded to itself on said step f in said region extending between each pair of the adjacent cores along an imaginary line extending transversely of said third web so that said region may partially remain on both sides of said imaginary line; and 30

h. releasing said elastic members to contract after said step g. 35

10. The method according to Claim 9, wherein said elastic members are belt-like elastic members each being 5 - 50 mm wide and secured to said side edges along a transversely middle line of this belt-like elastic member. 40

11. The method according to Claim 9, further comprising a step of forming said second web with means used to fasten said article to a wearer's garment. 45

50

55

FIG. 1

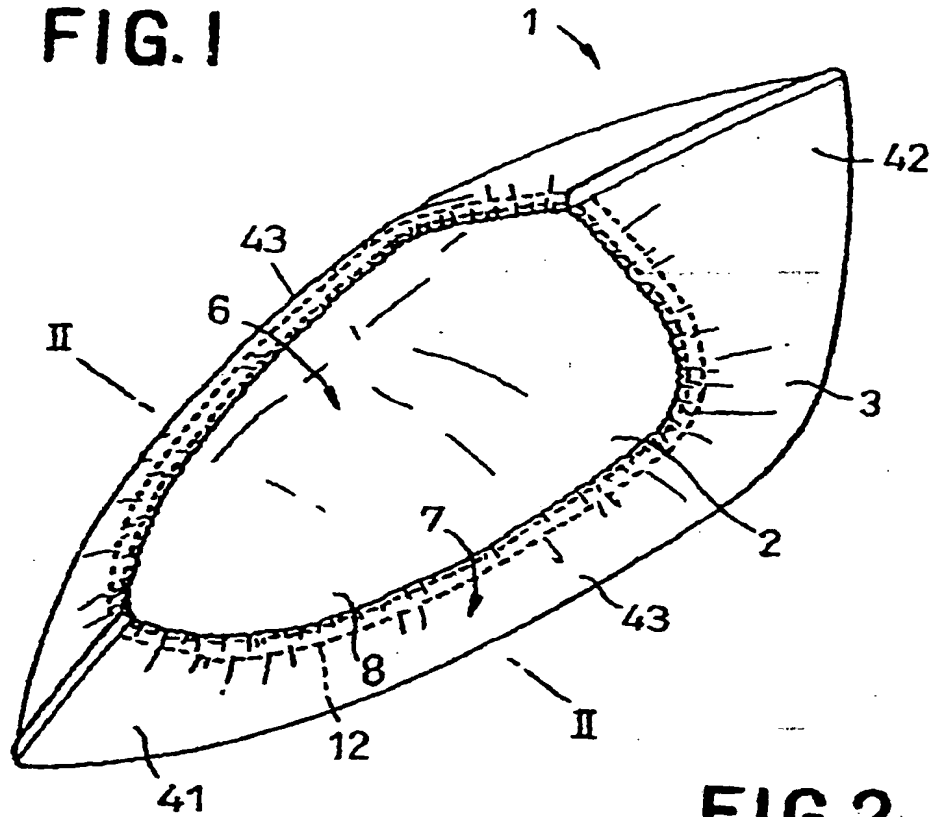


FIG. 2

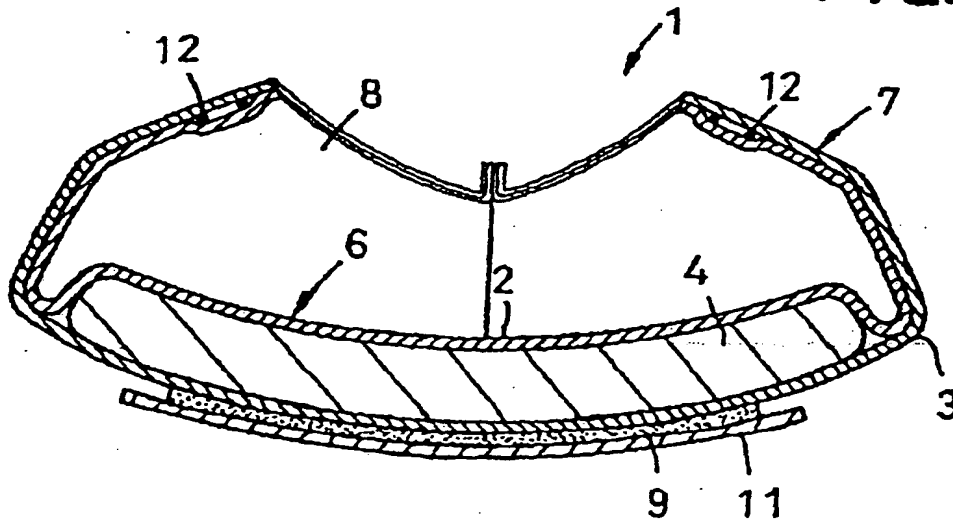
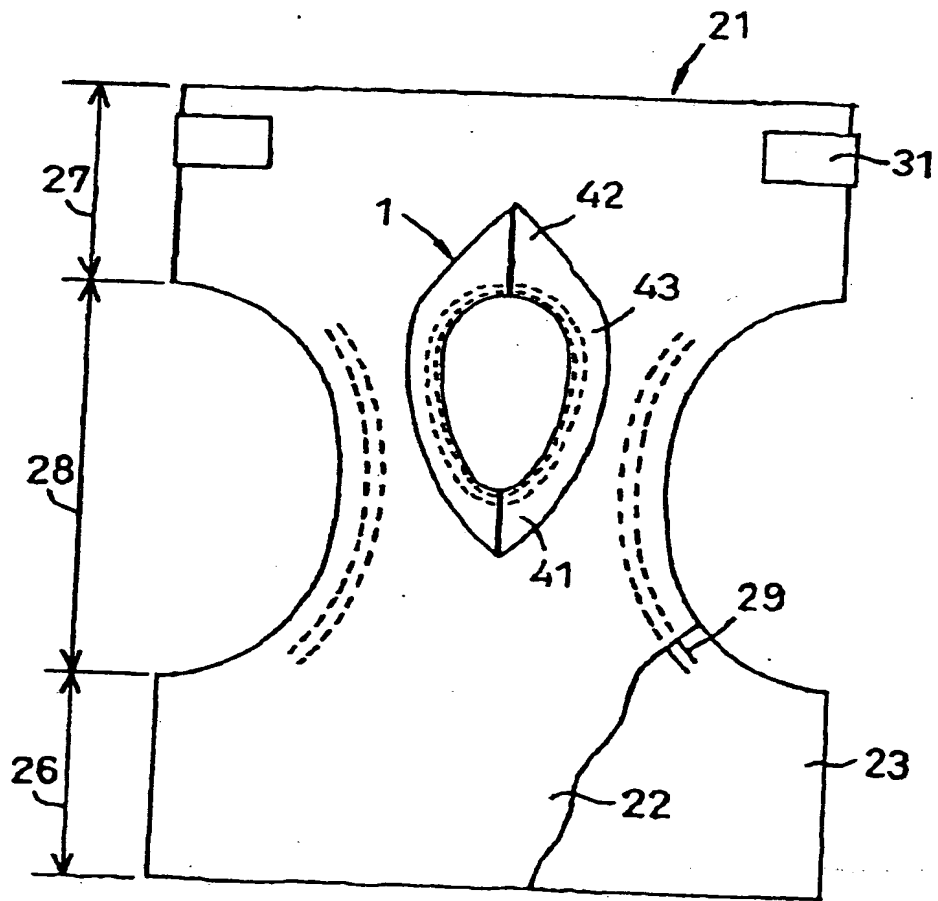


FIG.3



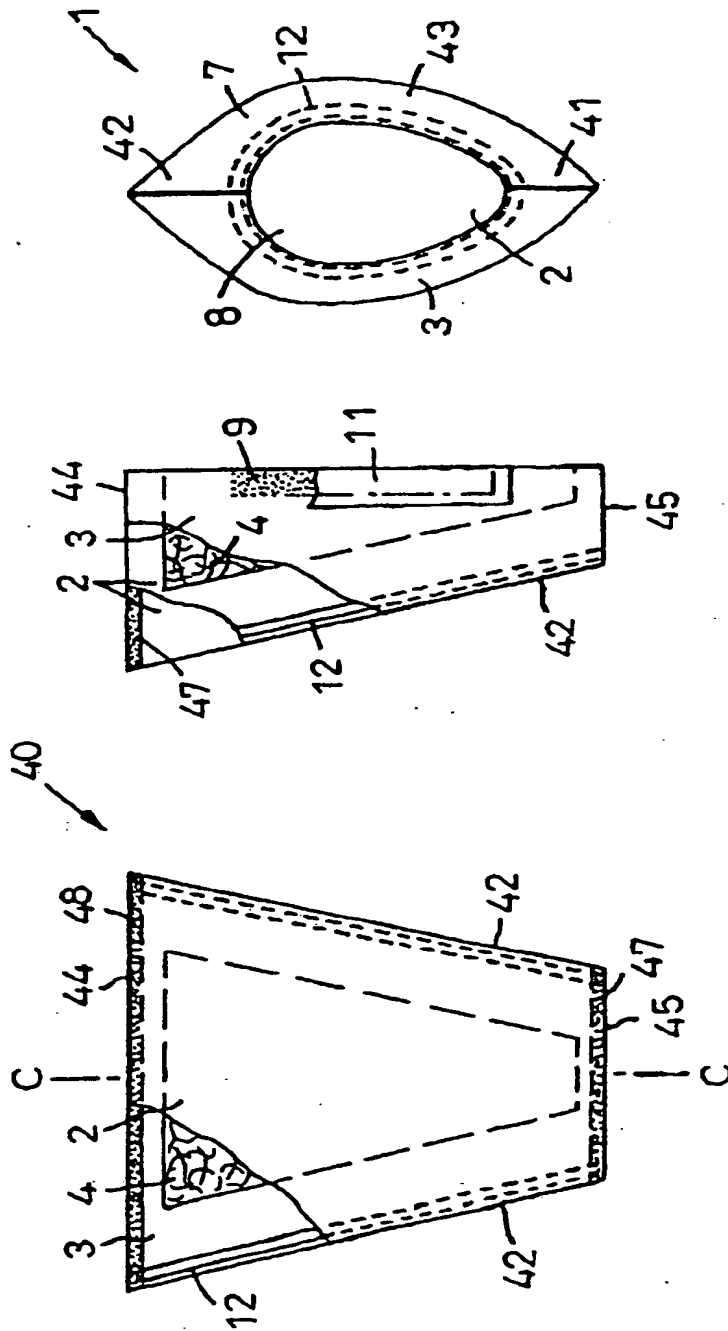


FIG. 4C

FIG. 4B

FIG. 4A

FIG. 5

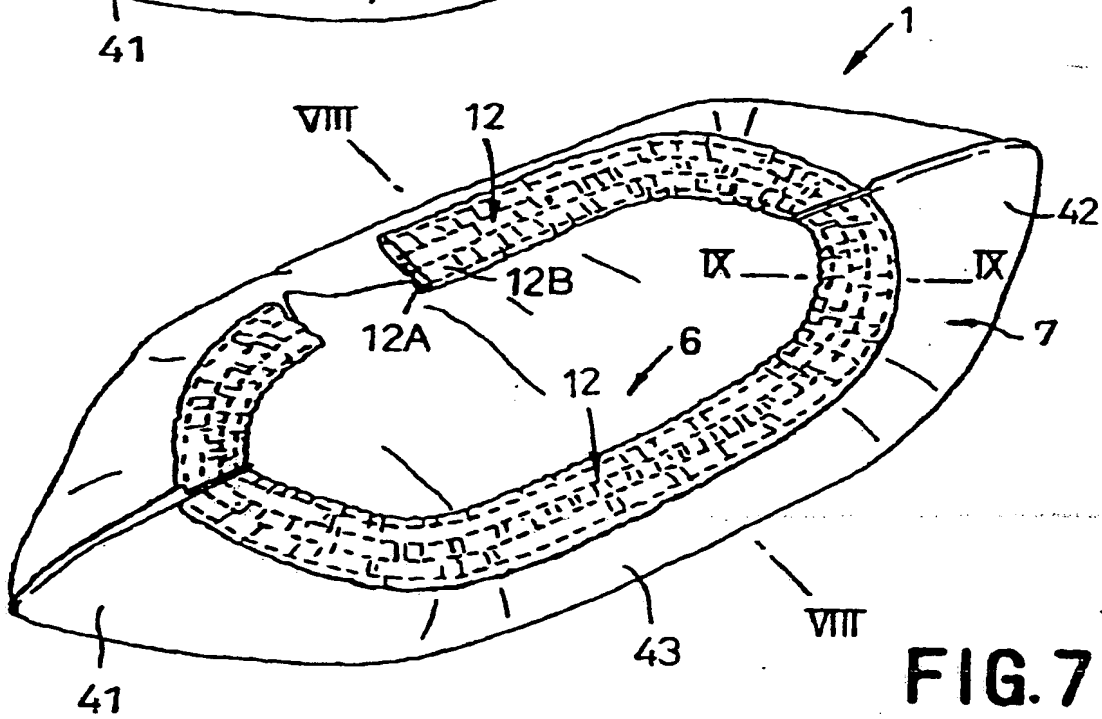
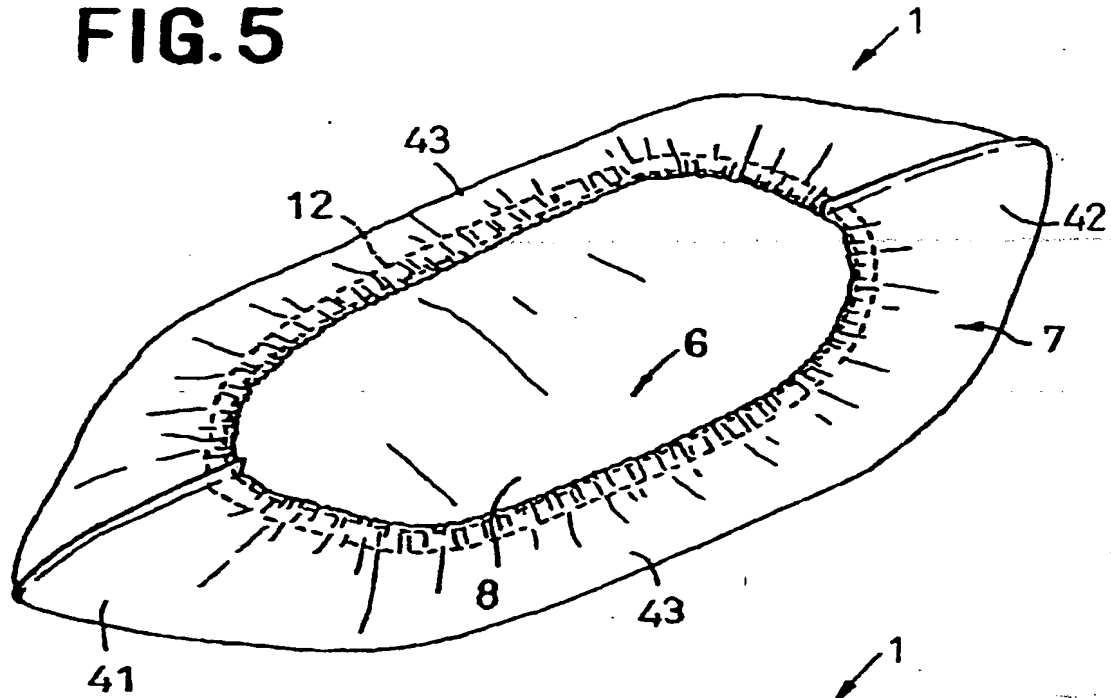


FIG. 7

FIG.6

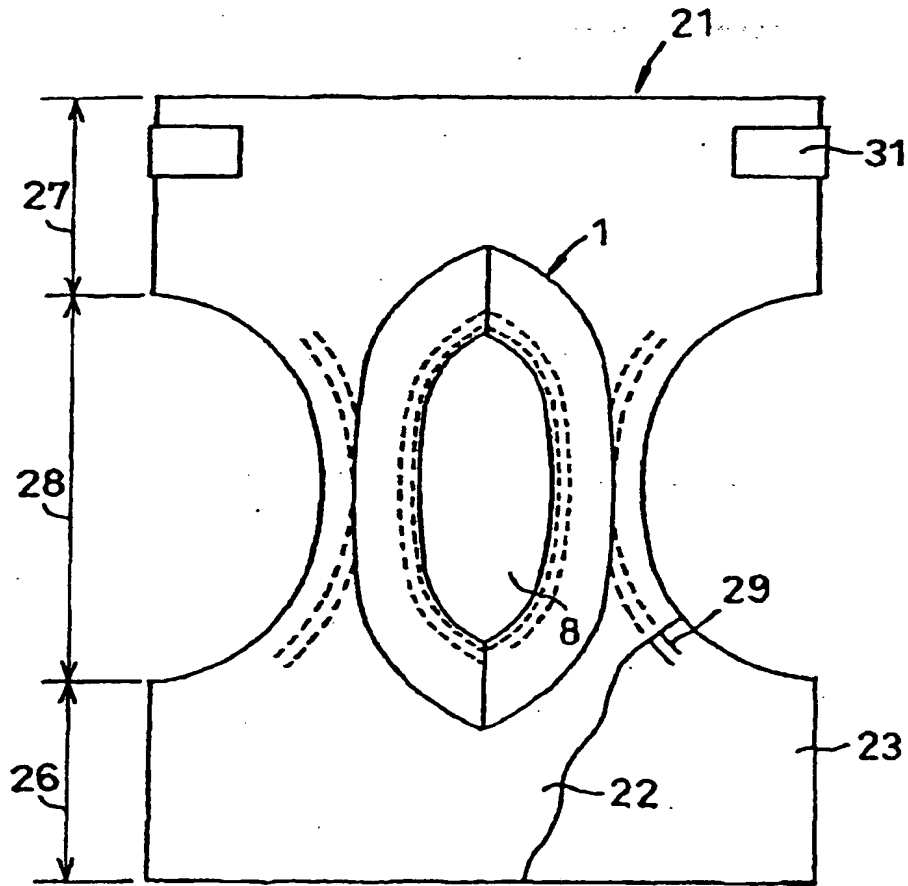


FIG.8

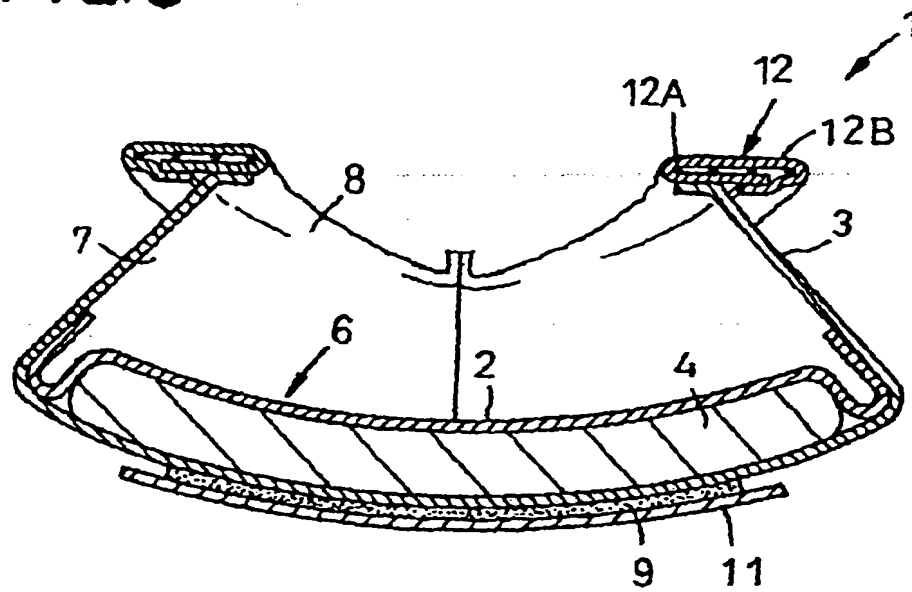


FIG.9

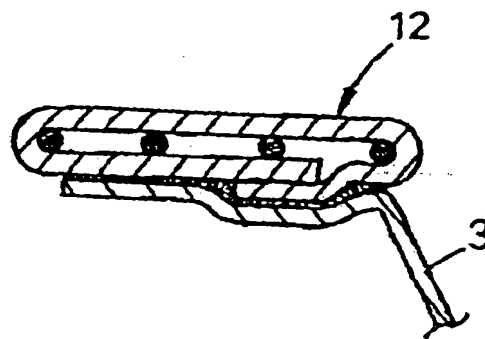


FIG.10

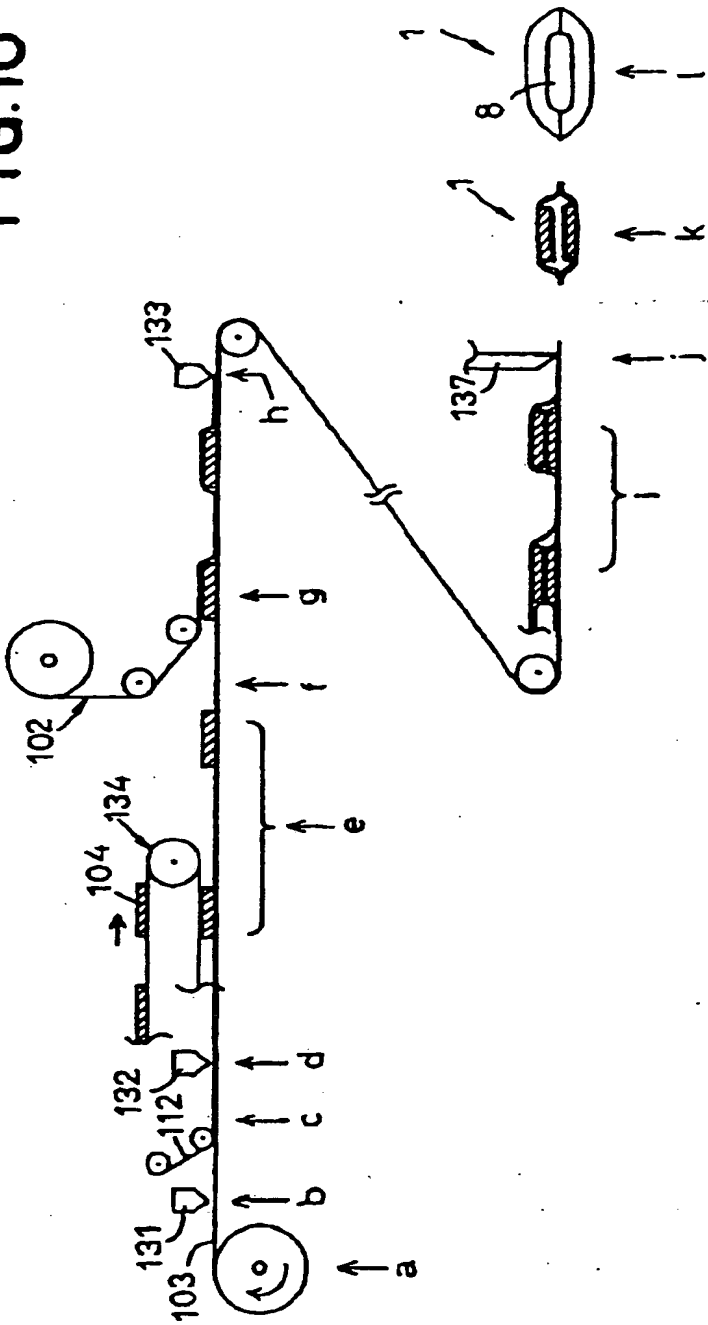


FIG. 11

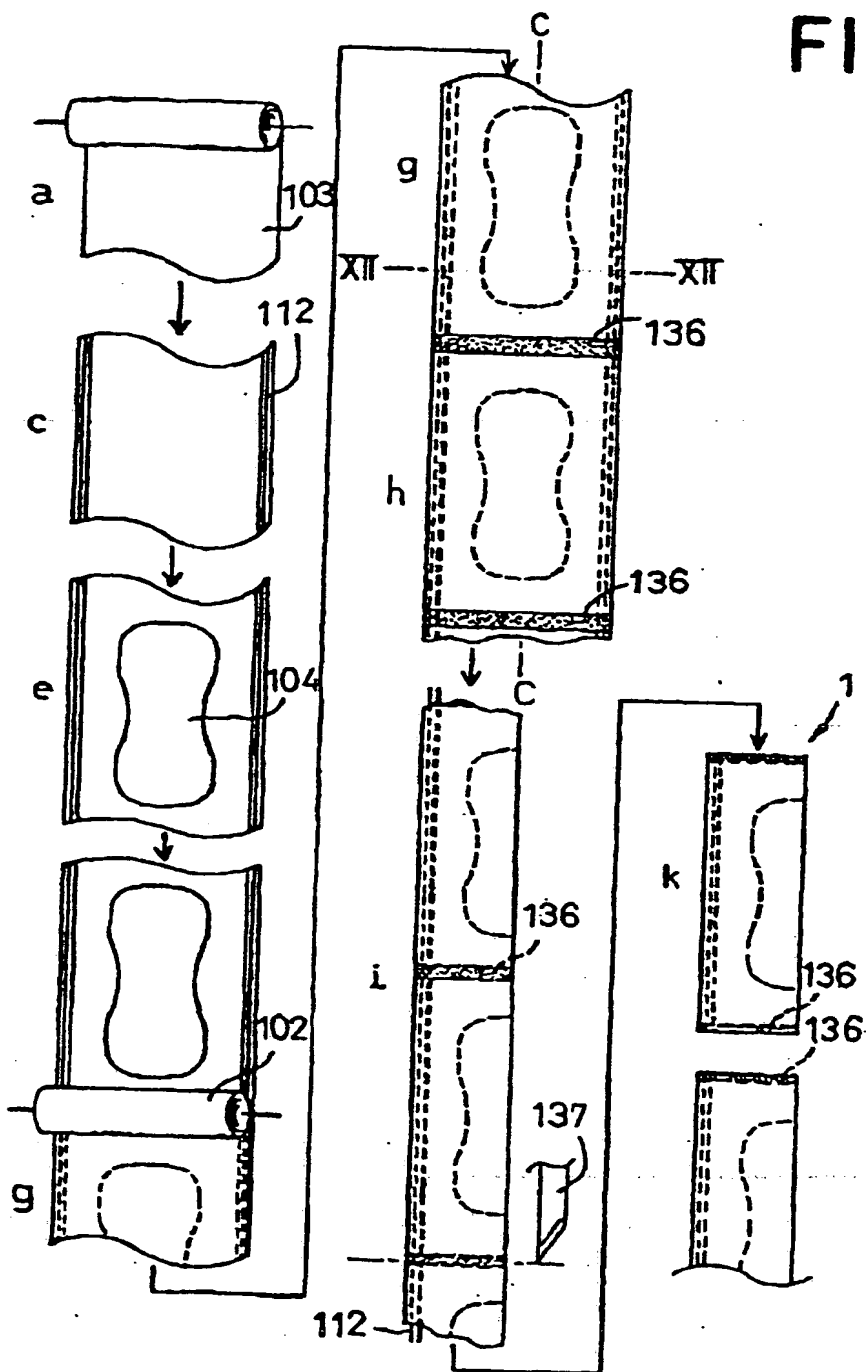


FIG.12

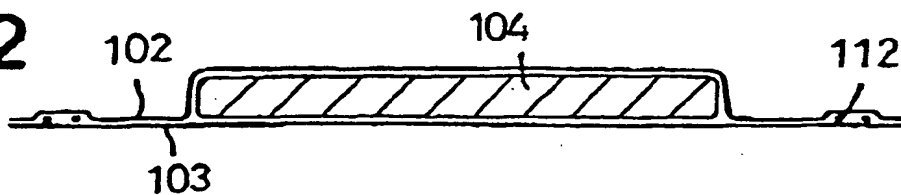


FIG.13


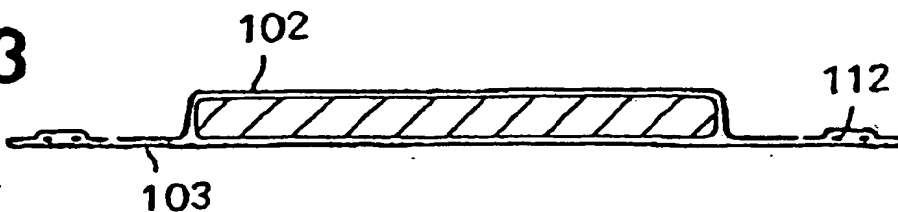


FIG.14



THIS PAGE BLANK (USPTO)

(19)

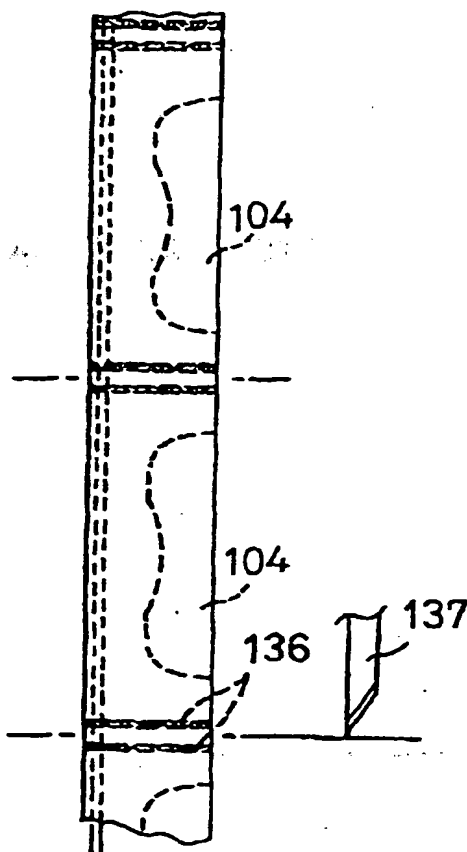

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 966 940 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
18.04.2001 Bulletin 2001/16

(51) Int Cl.7: A61F 13/15

(43) Date of publication A2:
29.12.1999 Bulletin 1999/52

(21) Application number: 99304159.9

(22) Date of filing: 28.05.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

- Otsubo, Toshifumi,
c/o Resear.& Development Divis.
Mitoyo-gun, Kagawa-ken 769-1602 (JP)
- Nishima, Yoshitaka,
c/o Resear.& Development Divis.
Mitoyo-gun, Kagawa-ken 769-1602 (JP)

(30) Priority: 29.05.1998 JP 14908298
23.04.1999 JP 11713999

(71) Applicant: UNI-CHARM CORPORATION
Kawanoe-shi Ehime-ken (JP)

(74) Representative: Enskat, Michael Antony Frank
Saunders & Dolleymore,
9, Rickmansworth Road
Watford, Hertfordshire WD18 0JU (GB)


(72) Inventors:
• Tanji, Hiroyuki,
c/o Research & Development Divis.
Mitoyo-gun, Kagawa-ken 769-1602 (JP)

(54) Body waste disposal article and method for making same

(57) A body waste disposal article 1 adapted to receive feces and/or urine discharged thereon, the article 1 having a body fluids absorbent means 6 above which an opening 8 is formed by a surrounding wall 7 partially covering the body fluids absorbent means 6 and sur-

rounding the opening 8. The article 1 is longitudinally composed of a front end 41, a rear end 42 and an intermediate region 43 extending between these two ends 41, 42. The article 1 is configured so as to have the largest width in its intermediate region 43.

FIG.1

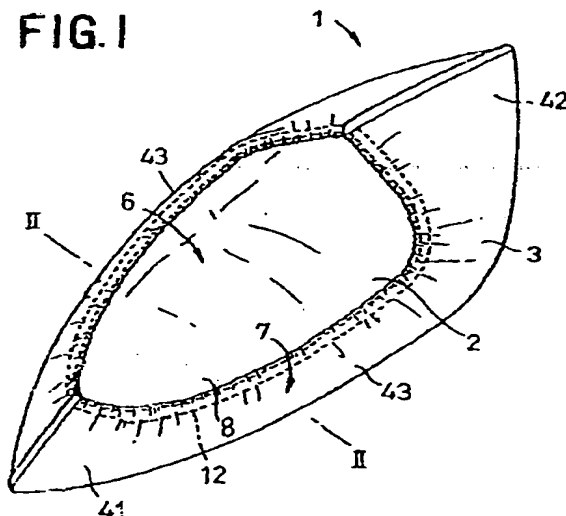

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 4159

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	US 5 667 503 A (ROE DONALD CARROLL ET AL) 16 September 1997 (1997-09-16) * column 7, line 27 - line 39; claims; figure 7 *	1-11	A61F13/15
A	US 5 236 428 A (ZAJACZKOWSKI PETER) 17 August 1993 (1993-08-17) * claims; figure 5 *	1-11	
A	GB 2 289 419 A (MOELNLYCKE AB) 22 November 1995 (1995-11-22) * claims; figures 1-3, 8 *	1-11	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			A61F
Place of search THE HAGUE		Date of completion of the search 26 February 2001	Examiner Mirza, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earliest patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPC-EPDM 1525 (3.92 (RUC01))

**ANNEX TO THE EUROPEAN SEARCH REPORT.
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 4159

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-02-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5667503 A	16-09-1997	US 5514121 A	07-05-1996
		US 5795347 A	18-08-1998
		US 5795348 A	18-08-1998
		AU 4415596 A	26-06-1996
		BR 9509868 A	25-11-1997
		CN 1173124 A	11-02-1998
		DE 69518662 D	05-10-2000
		EP 0796069 A	24-09-1997
		ES 2149389 T	01-11-2000
		JP 10512768 T	08-12-1998
		KR 244607 B	15-02-2000
		WO 9617572 A	13-06-1996
		ZA 9510457 A	30-05-1996
US 5236428 A	17-08-1993	NONE	
GB 2289419 A	22-11-1995	SE 502818 C	22-01-1996
		AT 184778 T	15-10-1999
		AU 686810 B	12-02-1998
		AU 2542195 A	05-12-1995
		CA 2190498 A	23-11-1995
		CN 1148800 A	30-04-1997
		CZ 9603341 A	14-05-1997
		DE 69512400 C	28-10-1999
		DE 69512400 T	20-04-2000
		DK 760643 T	17-04-2000
		EP 0760643 A	12-03-1997
		ES 2139207 T	01-02-2000
		FI 964601 A	15-11-1996
		GR 3032203 T	27-04-2000
		HK 1005770 A	22-01-1999
		HU 77831 A, B	28-08-1998
		IL 113654 A	17-08-1999
		JP 10503942 T	14-04-1998
		NO 964869 A	06-01-1997
		NZ 285882 A	19-12-1997
		PL 317251 A	01-04-1997
		SE 9401680 A	17-11-1995
		WO 9531162 A	23-11-1995
		SK 148096 A	06-08-1997
		US 5752946 A	19-05-1998
		ZA 9503704 A	09-04-1996

EPC FORM P/409

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)